

ripple **friulsider**



Nylon (Plastic) Light Duty Anchors

- a. FM XP
- b. TU**
- c. X 1
- d. TSS
- e. TML
- f. TAN

The classic nylon plug



TOP PERFORMANCES

**Excellent pull-out resistance,
due to the material used and the
geometry**



CONTROLLED EXPANSION

**Due to the special design of
the internal profile and
locating groove**

ANTIROTATION

**No rotation during installation
due to the external wings**




TU NYLON PLUG



VERSIONS:

- rimmed / rimless;
- with various types of screws and accessories;
- also available in polypropylene.

- **UNIVERSAL PLUG** suitable for most light fixing applications;
- **MAXIMUM EXPANSION** in the base material with the wide neck of the plug protecting the surface from damage (plaster, tile etc).

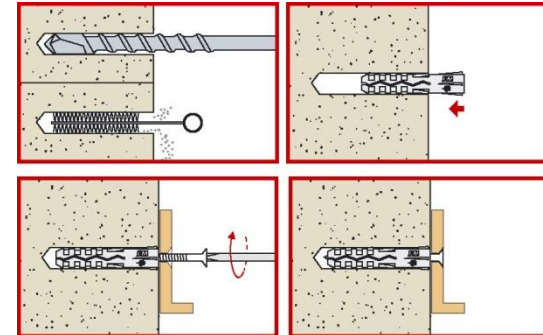

- concrete
- solid brick
- honeycomb brick
- cell like clay brick
- light weight honeycomb brick
- hollow dense aggregate block
- hollow light aggregate block
- aerated concrete
- solid stone



Rimmed plug

Cheville avec collerette

Code	Plug Cheville Ø x L	Per box / En boîte		Per bag / En sachet		Bulk / En vrac
		Box q.ty Boîte de	Pkg. Cond.	Box q.ty Boîte de	Pkg. Cond.	
60001004020*	4x20	300	15000	1000	20000	30000
60001005025	5x25	100	5000	1000	20000	15000
60001006030	6x30	100	5000	1000	10000	10000
60001007035*	7x35	150	7500			7000
60001008040	8x40	100	5000	1000	5000	4000
60001010050	10x50	50	2500	500	2500	2000
60001010060	10x60	50	2500			1800
60001012060*	12x60	25	1250	250	1500	1200
60001014080*	14x80	20	1000			600
60001016080*	16x80	15	750			500



Rimless plug

Cheville sans collerette

Code	Plug Cheville Ø x L	Per box / En boîte		Per bag / En sachet		Bulk / En vrac
		Box q.ty Boîte de	Pkg. Cond.	Box q.ty Boîte de	Pkg. Cond.	
60101004020*	4x20	300	15000	1000	20000	30000
60101005025	5x25	100	5000	1000	20000	15000
60101006030	6x30	100	5000	1000	10000	10000
60101007035*	7x35	150	7500			7000
60101008040	8x40	100	5000	1000	5000	4000
60101010050	10x50	50	2500	500	2500	2000
60101010060	10x60	50	2500			1800
60101012060*	12x60	25	1250	250	1500	1200
60101014080*	14x80	20	1000			600
60101016080*	16x80	15	750			500

