

ripple **friulsider**

TCS


Long Nylon Plug with nail screw

Ideal Anchor for Frame Fixings



TOP PERFORMANCE

The internal and external design generates increased expansion



CONTROLLED EXPANSION

The locating groove in the plug ensures a correct positioning of the screw during installation

HEAD NAIL SCREW

Prevents internal damage to the plug



friulsider

since 1966



CERTIFICATION OF QUALITY MANAGEMENT SYSTEM
ISO 9001 Cert. n° 1085

CERTIFICATION OF ENVIRONMENTAL MANAGEMENT SYSTEM
ISO 14001 Cert. n° 0050A



▶ TCS Long nylon plug with nail screw

- concrete
- solid brick
- honeycomb brick
- light weight honeycomb brick
- hollow dense aggregate block
- hollow light aggregate block
- aerated concrete
- solid stone

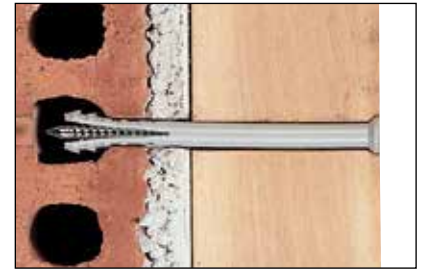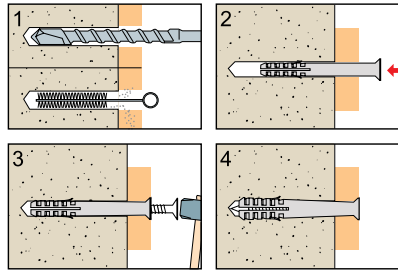

Countersunk rim
countersunk head nail screw
white zinc plated
Pozidrive recess



Code	Plug Ø x L	Fixing thickness max	Box q.ty
60301b05030	5x30	5	100
60301b05050	5x50	25	100
60301b06040	6x40	10	100
60301b06060	6x60	30	100
60301b06080	6x80	50	100
60301b08060	8x60	20	100
60301b08080	8x80	40	100
60301b08100	8x100	60	50
60301b08120	8x120	80	50
60301b08135	8x135	95	50
60301b08160	8x160	120	50