

**ripple** **friulsider**


**TUP**

Long Nylon Plug

## Ideal Anchor for Frame Fixings

### TOP PERFORMANCE

The internal and external design generates increased expansion



### CONTROLLED EXPANSION

The locating groove in the plug ensures a correct positioning of the screw during installation

**ROUNDED THREAD SCREW**  
Prevents internal damage to the plug



**friulsider**

since 1966

CERTIFICATION OF QUALITY MANAGEMENT SYSTEM  
ISO 9001 Cert. n° 1085

CERTIFICATION OF ENVIRONMENTAL MANAGEMENT SYSTEM  
ISO 14001 Cert. n° 0050A




## TUP Long nylon plug

- concrete
- solid brick
- honeycomb brick
- cell like clay brick
- light weight honeycomb brick
- hollow dense aggregate block
- hollow light aggregate block a
- aerated concrete
- solid stone



Plug only

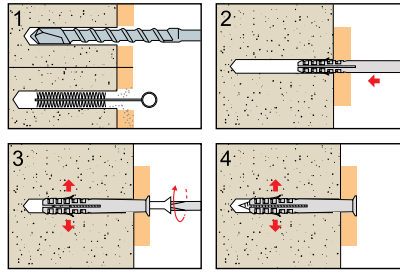

Code	Plug Ø x L	Fixing thickness max	Box q.ty
60300006040	6x40	10	100
60300006060	6x60	30	100
60300006080	6x80	50	100
60300008060	8x60	20	100
60300008080	8x80	40	100
60300008100	8x100	60	100
60300008120	8x120	80	100
60300008135	8x135	95	100
60300008160	8x160	120	100
60300010060	10x60	10	100
60300010070	10x70	20	100
60300010080	10x80	30	100
60300010100	10x100	50	100
60300010115	10x115	65	100
60300010135	10x135	85	100
60300010160	10x160	110	100

Countersunk head screw  
white zinc plated  
Ø 6 Pozidrive n°2 recess  
Ø 8 Pozidrive n°3 recess  
Ø10 Pozidrive n°4 recess  
Ø10 Torx T-40 recess



Pozidrive Code	Torx	Plug Cheville Ø x L	Screw Ø x L	Fixing thickness max	Box q.ty
60303b06060		6x60	4x65	30	100
60303b08060		8x60	5.5x65	20	100
60303b08080		8x80	5.5x85	40	100
60303b08100		8x100	5.5x105	60	100
60303b08120		8x120	5.5x125	80	50
60303b08135		8x135	5.5x140	95	50
60303b08160		8x160	5.5x165	120	50
60303b10060	60309b10060s	10x60	7x65	10	50
	60309b10070s	10x70	7x75	20	50
60303b10080	60309b10080s	10x80	7x85	30	50
60303b10100	60309b10100s	10x100	7x105	50	50
60303b10115	60309b10115s	10x115	7x120	65	50
60303b10135	60309b10135s	10x135	7x140	85	50
60303b10160	60309b10160s	10x160	7x165	110	50

Hex head screw  
white zinc plated  
Ø 10 wrench 13



Code	Plug Ø x L	Screw Ø x L	Fixing thickness max	Box q.ty
60308b10060	10x60	7x65	10	50
60308b10070	10x70	7x75	20	50
60308b10080	10x80	7x85	30	50
60308b10100	10x100	7x105	50	50
60308b10115	10x115	7x120	65	50
60308b10135	10x135	7x140	85	50
60308b10160	10x160	7x165	110	50